


SMARTPHONE /
TABLET USE
ohne App!



230 V

POWER SUPPLY

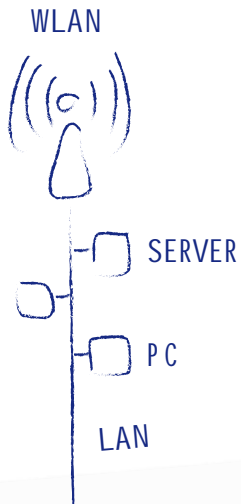

① 5 - 12 V DIGITALE LED
STREIFEN / PANELS DYCOLED
(LPD6803 .. WS2811..)

KABELVERBINDUNGEN



IDYCOLED CONTROL
(55 x 24 x 54 mm)
Webserver integriert

DMX IN (optional)
zur Integration in prof. Licht-
managementsysteme

ART-NET IN, DMX OUT
parallel zu SPI (optional)



② 12 - 24 V
RGB LED
STREIFEN

KABELVERBINDUNGEN



IDYCOLED DIMMER
(72 x 28 x 88 mm)



LED LAMPEN...

POWER SUPPLY
230 V

② + ③

110 - 250 V
VERBRAUCHER
(DREHTELLER,
SCHAUFENSTER-
BELEUCHTUNG...)



ANWENDUNGSBEISPIEL